The Kinetic Energy Potential of Pressurized Natural Gas Wells

Robert D. Hunt[1]
Founder and Chief Scientist for Linear Power Ltd., Long Beach, MS 39560 USA

Presented at the Southern Methodist University (SMU) Geothermal Energy Utilization Associated with Oil and Gas Development Conference
On June 12, 2007

It has long been known that there are substantial quantities of kinetic energy that can be derived from the pressure of natural gas wells. However, prior art kinetic energy conversion methods have not proven to be cost effective or efficient for the following reasons: (1) the reliance on rotating turbine style equipment of which the blades are not usually fabricated to withstand the extreme pressure associated with natural gas wells; and, (2) rotation creates centrifugal forces that become greater with increased velocity, which imposes limits on the velocity at which turbine units, electrical generators, and alternators may operate; and, (3) turbine units are designed for very specific pressure ranges and even relatively small pressure variations can cause the need for blade changes and larger pressure changes generally result in the entire failure of operation of the turbine; and, (4) the high pressure, dual phase discharge from natural gas wells comprises methane gas and other corrosive gases,

well known that gas wells continue to drop in pressure as the amount of gas within the reservoir decreases on a continuous basis, which makes the use of pressure sensitive turbines extremely problematic. Geothermal steam wells also experience substantial pressure drops. For example, the Geysers Geothermal Field is one of the oldest and grandest geothermal sites resources in the world that has produced vast quantities of hi

calculating the kinetic energy potential of natural gas wells having high-pressure and high flow rates. The full calculation modeled additional pressure ranges and flow rates. However, any range of conditions may be input into the spreadsheet for immediate calculation. This portion of the chart shown herein clearly and dramatically demonstrates the tremendous potential of high-pressure, high flow rate natural gas wells through out the US, Canada, and the rest of the world to generate many millions of megawatts of electrical power.

Linear Power, Ltd.'s Kinetic Energy Linear Alternator

Kinetic Energy Potential of High-Pressure High Flow-Rate Gas Wells for Producing MW's of Electricity

Computation of the ideal power produced by pressurized gas Methane (M=16 kg/kmol)

	High Pressure Gas Wells		
Enter Flowrate in Mcfd	**10,000**	**6,000**	**2,000**
Volumetric flow rate in cfs:	115.7	69.4	23.1
Enter Pressure in psig:	**7000**	**5000**	**3000**
Pressure ratio for expansion to 15 psig	0.0021	0.0030	0.0050
Enter Temperature in degrees Fahrenheit:	150	150	0
Temperature in degrees Kelvin	338.6	338.6	255.2
Equals Power Produced in Megawatts (MW)	**359**	**150**	**33**
Equals MW Hours Per Year	2,988,395	1,247,621	272,496
Equals Annual Revenues @ 5-cents/kWh	$149,419,771	$62,381,026	

Mcf is one thousand cubic feet. Natural gas is sold in units of Mcf. Mcfd represents the number of Mcf units per day. In the first line of the chart 10,000 Mcfd equals ten million cubic feet of gas per day (10,000 times 1,000 = 10,000,000). The second line converts this volume of gas into flow rate per second, which is 115.7 cubic feet per second

Linear power equipment cycles back-and-forth like an old locomotive steam engine. This is accomplished by maintaining a pressure differential to the opposite sides of the piston. A driver unit that is a modified slide valve supplies high-pressure steam, gas, water, etc. working fluid into the cylinder on one side of the piston at the same time as it exhausts the working fluid from the cylinder to lower pressure on the opposite side of the piston. The piston moves in the direction of the lower pressure in response to force applied by the higher pressure. Once the piston has moved to the end of the cylinder, the slide valve reverses the high-pressure input and low-pressure exhaust to cause the piston to move in the opposite direction, and then reverses again in a continuous back-and-forth cycle that maintains a continuous pressure imbalance on the opposite sides of the piston.

Linear Alternator developed by Linear Power, Ltd.

The Linear Power Ltd. proprietary linear power unit used to harness the kinetic energy of natural gas wells comprises three pieces of reciprocating equipment: (1) a linear alternator that is driven back-and-forth by a pneumatic ram in order to generate 60 Hz AC electrical power; and, (2) a pneumatic ram prime mover, being a movable piston and rod within a cylinder that forms a housing, that is actuated by a driver mechanism that controls the flow of high-pressure natural gas into the cylinder of the ram and directs the exhaust flow from the cylinder; and, (3) a driver, being a modified slide valve, whose function is to maintain an alte

The linear alternator comprises at least one positive field and at least one negative field. Movement back-and-forth generates alternating current by successively moving from the positive field to the negative field then back to the positive field in a continuous cycle. In order to produce sixty-Hertz alternati

and negativst one pos positive fields may be inc9 6 d so th6

Pairs of coils move in opposite directions to each other, like clapping your hands together and then moving them apart with each hand going in the opposite direction in order to cancel out vibration. Th

A check valve prevents the reverse flow of working fluid back into the supply line. When the pressure is sufficient, the piston, rod and coil are stopped; and, then immediately accelerated back in the opposite direction by the compressed, extremely high pressure working fluid at which time the pressure drops as the piston moves forward providing a greater area allowing additional pressurized working fluid to enter the cylinder of the ram to apply a force against the piston to accelerate it back to the original speed as it moves down the cylinder in the opposite direction. This proce

ram that create a back-and-forth cycle to generate electrical power, which can be accomplished at very high rates of speed.

Linear A that involves hooking up the linear driver, pneumatic ram, and linear alternator to a high pressure, high flow rate gas well that pr

Propane and carbon dioxide are two high vapor pressure working fluids that work well as gas-lift pumping working fluids because they may readily be condensed back to the liquid phase, have high vapor pressures, and their rate of expansion is high in response to increased temperature so that their volume increases significantly as they are heated. Also, they are also easily separated from water.

In the process of Linear B. low mass vapor is used to accelerate high mass liquids to high velocity, resulting in a much larger power output due to the increased kinetic energy level of the water and resulting in a large quantity of hot liquid being pumped from the geothermal well. This high velocity, high mass water exerts a very substantial “waterhammer effect” that is created by suddenly starting or stopping a flow of water. The great force of the hammer effect beneficially provides a great deal of kinetic energy to power a prime mover, but the equipment used must be very robust and be specifically designed to handle the force of the impact of this powerful dual-phase working fluid that is applied to the prime mover.

In operation of the gas-lift power cycle, liquid phase low-boiling-point-liquid is injected deep into the well bore by a stringer tube and thermal energy provided by the hot liquid heat source boils the low-boiling-point-liquid into high-pressure vapor. In most cases the water temperature is only lowered a few degrees due to the large flow rate of hot water that is gas-lifted from the well. Therefore, this hot liquid may be used to provide thermal energy for an organic Rankine cycle (ORC) power cycle. This provides the potential for Linear Power, Ltd.’s proprietary gas-lift power cycle to be used in conjunction with the United Technologies Corporation’s (UTC) or Ormat’s proprietary ORC units in order to supply hot water for their ORC cycles.

Linear C. is an innovative power cycle created by Robert Hunt for Linear Power, Ltd. that is much like a conventional ORC except that the liquid pump is eliminated and the liquid phase working fluid is returned to the vaporizer at equalized pressure. Linear Power, Ltd.’s new process originated from experience in operation of a earlier cycle much like the Deluge, Inc. process that sequentially heats and then cools the working fluid to cause it to expand and contract as heat is added then removed to create a back-and-forth movem

back to a vaporizer as is required by the ORC process. Further, the Sterling process allows the use of high vapor pressure working fluids, such as carbon dioxide, because the energy required to pump the liquid phase back to the vaporizer in order to use an ORC process takes more energy than the cycle produces, due to the extreme-pressure maintained within the vaporizer with use of the these high pressure working fluids, the low entropy levels of these high-pressure working fluids to power bladed turbines, and the low expansion rates from the liquid phase to the gaseous phase of these high pressure working fluids, as compared to the expansion rate of the liquid phase to the vapor phase of typical working fluids used by ORC cycles that are many times greater.

The Hydraulic Thermal Engine pictured above was tested on March 25, 2005 and was in continuous operation producing of 3.5 kW power until it was lost to Hurricane Katrina in August 29, 2005. We believe that the unit holds the world record for commercial low-temperature power generation because the hot water heat source was only 90 degrees F. with heat rejection to 65 deg. F. temperature water, having only 25 deg. F. Delta temperature. The heat was rejected to fishpond water to provide water heating to insure their winter survival.

However, it was felt that the cycle time of once every twelve seconds to sequentially heat and cool the working fluid was much too slow, too much useful energy was wasted in the process, and it was believed that the process could be dramatically improved upon, which led to the development of an ORC process that returns the liquid phase working fluid back to the boiler using a multiplication of force process at equalized pressure in order to eliminate the liquid pump from the ORC cycle. In Linear Power Ltd.’s new ORC process, high pressure vapor from the vaporizer is available as soon as the control slide valve is opened to power movement of the positive displacement piston while at the same time on the opposite side of the piston the working fluid is exhausted to low pressure to the condenser when the control slide valve is opened. Continuous pressure differentials are sequentially and rapidly maintained on the opposite sides of the piston. Using the new process, cycle times of 3,600 times per minute may be obtained by a single pneumatic ram in order to directly generate 60 Hz AC power output without the need for expensive power conditioning equipment.

Deluge addressed the slow cycle time of their units by creating a series of pistons and cylinders working out of phase like the pistons of a combustion engine that are connected to a flywheel in order to create rotation. Linear Power, Ltd. believes that too much power is lost due to the poor vector angles atta

Liquid Pump, further M

of liquid needed to pump the liquid into the vaporizer equals a vapor ratio of 13 that remains as a net volume expansion ratio of the working fluid remaining for power output in this example).

The higher the volume expansion ratio of cold low pressure liquid from the condenser, which is expanded via heat input at the vaporizer into a greater volume of higher pressure vapor; the greater the net power output for this cycle, using positive displacement multiplication of power at equalized pressure that is able to be performed as a result of the ratio of fluid expansion within the vaporizer. This methodology also applies to a modified Brayton cycle wherein the expansion of gas within in a heater is sufficient to compress cooled, higher density vapor from a cooler back into the heater via multiplication of force at equalized pressure, having additional expansion remaining to produce power output.

Only two state points need be analyzed because the operation of the power cycle forms a continuous back-and-forth reversal of these two states.

The working fluid used in this analysis is Honeywell brand refrigerant Genetron R245fa that has been specifically formulated for Rankine power cycles (See http://www.honeywell.com/sites/sm/chemicals/genetron/organicrank.htm and the Applications Development Guide at http://www.honeywell.com/sites/docs/doc19194b8-fb3ebd023d-3e3e4447ab3472a0c2a5e5fdc1e6517d.pdf to see the R245fa Thermodynamic Tables).

Both English and (SI) units are given in the analysis. Four different temperature ranges are analyzed: (1) 40 deg. F. (4.44 deg. C.) low temperature with 80 deg. F. (26.7 deg. C.) high temperature; and (2) 65 deg. F. (18.3 deg. C.) low temperature with 90 deg. F. (32.2 deg. C.) high temperature; and, (3) 110 deg. F. (43.3 deg. C.) low temperature with 165 deg. F. (73.9 deg. C.) high temp

Drawing of State Point One

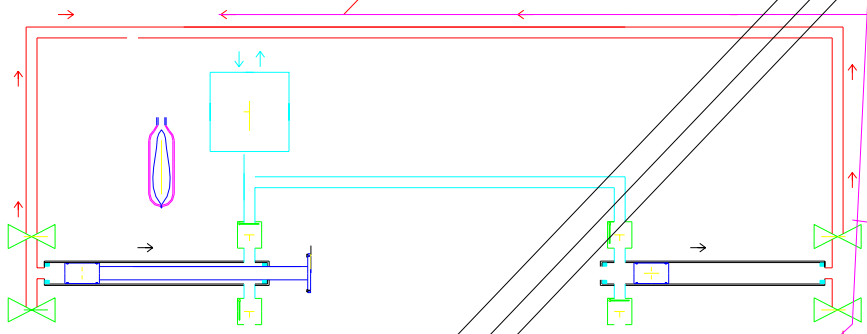

will vaporize into 153.64 cubic feet of vapor at 23 psi within the Vaporizer.

positive displacement piston powering a linear alternator is most likely the most efficient option available for this temperature range as the desired amount of force required to be exerted on Rods A & B to power the linear alternator back-and-forth can be readily controlled by the displacement of the Piston A & B.

As Piston B moves to the right in the Drawing, liquid from the bottom of the Condenser fills the intensified side of Cylinder B that has Rod B thereby reducing its area by a ratio of 153.64 times less. The incoming one cubic foot of liquid from the Condenser is under 9.5 psi of pressure, but the surface area of the Piston B on the intensified side is nearly all taken up by Rod B and the positive force to help move to the right is only an additional 19 pounds of force (2 to 1 ratio) and is thereby negligible to the operation of the cycle, but partially offsets the 46 pounds of force needed to pump the liquid into the Vaporizer as previously described.

Note that the cycle provides equalized pressure. The pressure on both sides of Piston A within Cylinder A is 23 psi as both sides of Piston A are fluidly connected to the Vaporizer. Therefore only minimal additional pressure is needed to pump liquid from the intensified side of Cylinder A into the Vaporizer through open Check Valve #6. Likewise, both sides of Piston B within Cylinder B are fluidly connected to the Condenser having a pressure of 9.5 psi.

Pressure – 98 psi
Liquid Density – 74.39 lb/ft3 (
Vapor Volume – 0.4309 ft3/lb

Delta Pressure – 57.3 psi

Delta Temperature – 55 deg. F.

Intensification ratio – 34.63 to 1 (Expansion Ratio of Liquid Volume to Vapor Volume – 1 ft3 Liquid to 34.63 ft3 Vapor)

Intensified Force:
Gross Force – 3,393.74 lbs
Net Force – 1,869.7 (3,393.74 lbs gross force; less 196 lbs liquid pumping force; less 1409.44 lbs opposing force from condenser pressure; plus 81.4 liquid force from condenser = 1,869.7 lbs of net power output force)

(4) Condenser @ 110 deg. F. (43.3 deg. C.):
Pressure – 40.7 psi
Liquid Density – 80.37 lb/ft3

State Point Two is identical to State Point One only in the movement is in the opposite direction to the left instead of to the right as in State Point One. Higher-pressure vapor from the Vaporizer flows into Intensifier B through open Solenoid Valve #4. The force translated by Rod B to Rod A causes movement of both Piston A and Piston B in a direction to the left in the Drawing of State Point Two as the vapor in Intensifier A flows through open Solenoid Valve #1 into the Condenser and reduces in pressure. The intensified liquid on the Rod B side of Intensifier B is forced through open Check Valve #8 and flows through the Throttle to the Vaporizer to be vaporized into additional vapor in a cycle. Liquid from the Condenser is drawn into the intensified side of Cylinder A as Piston A moves to the left forming a Vacuum within the intensified side of Cylinder A having Rod A that reduces the area within the intensified side of Intensifier A.

Drawing of State Point Two

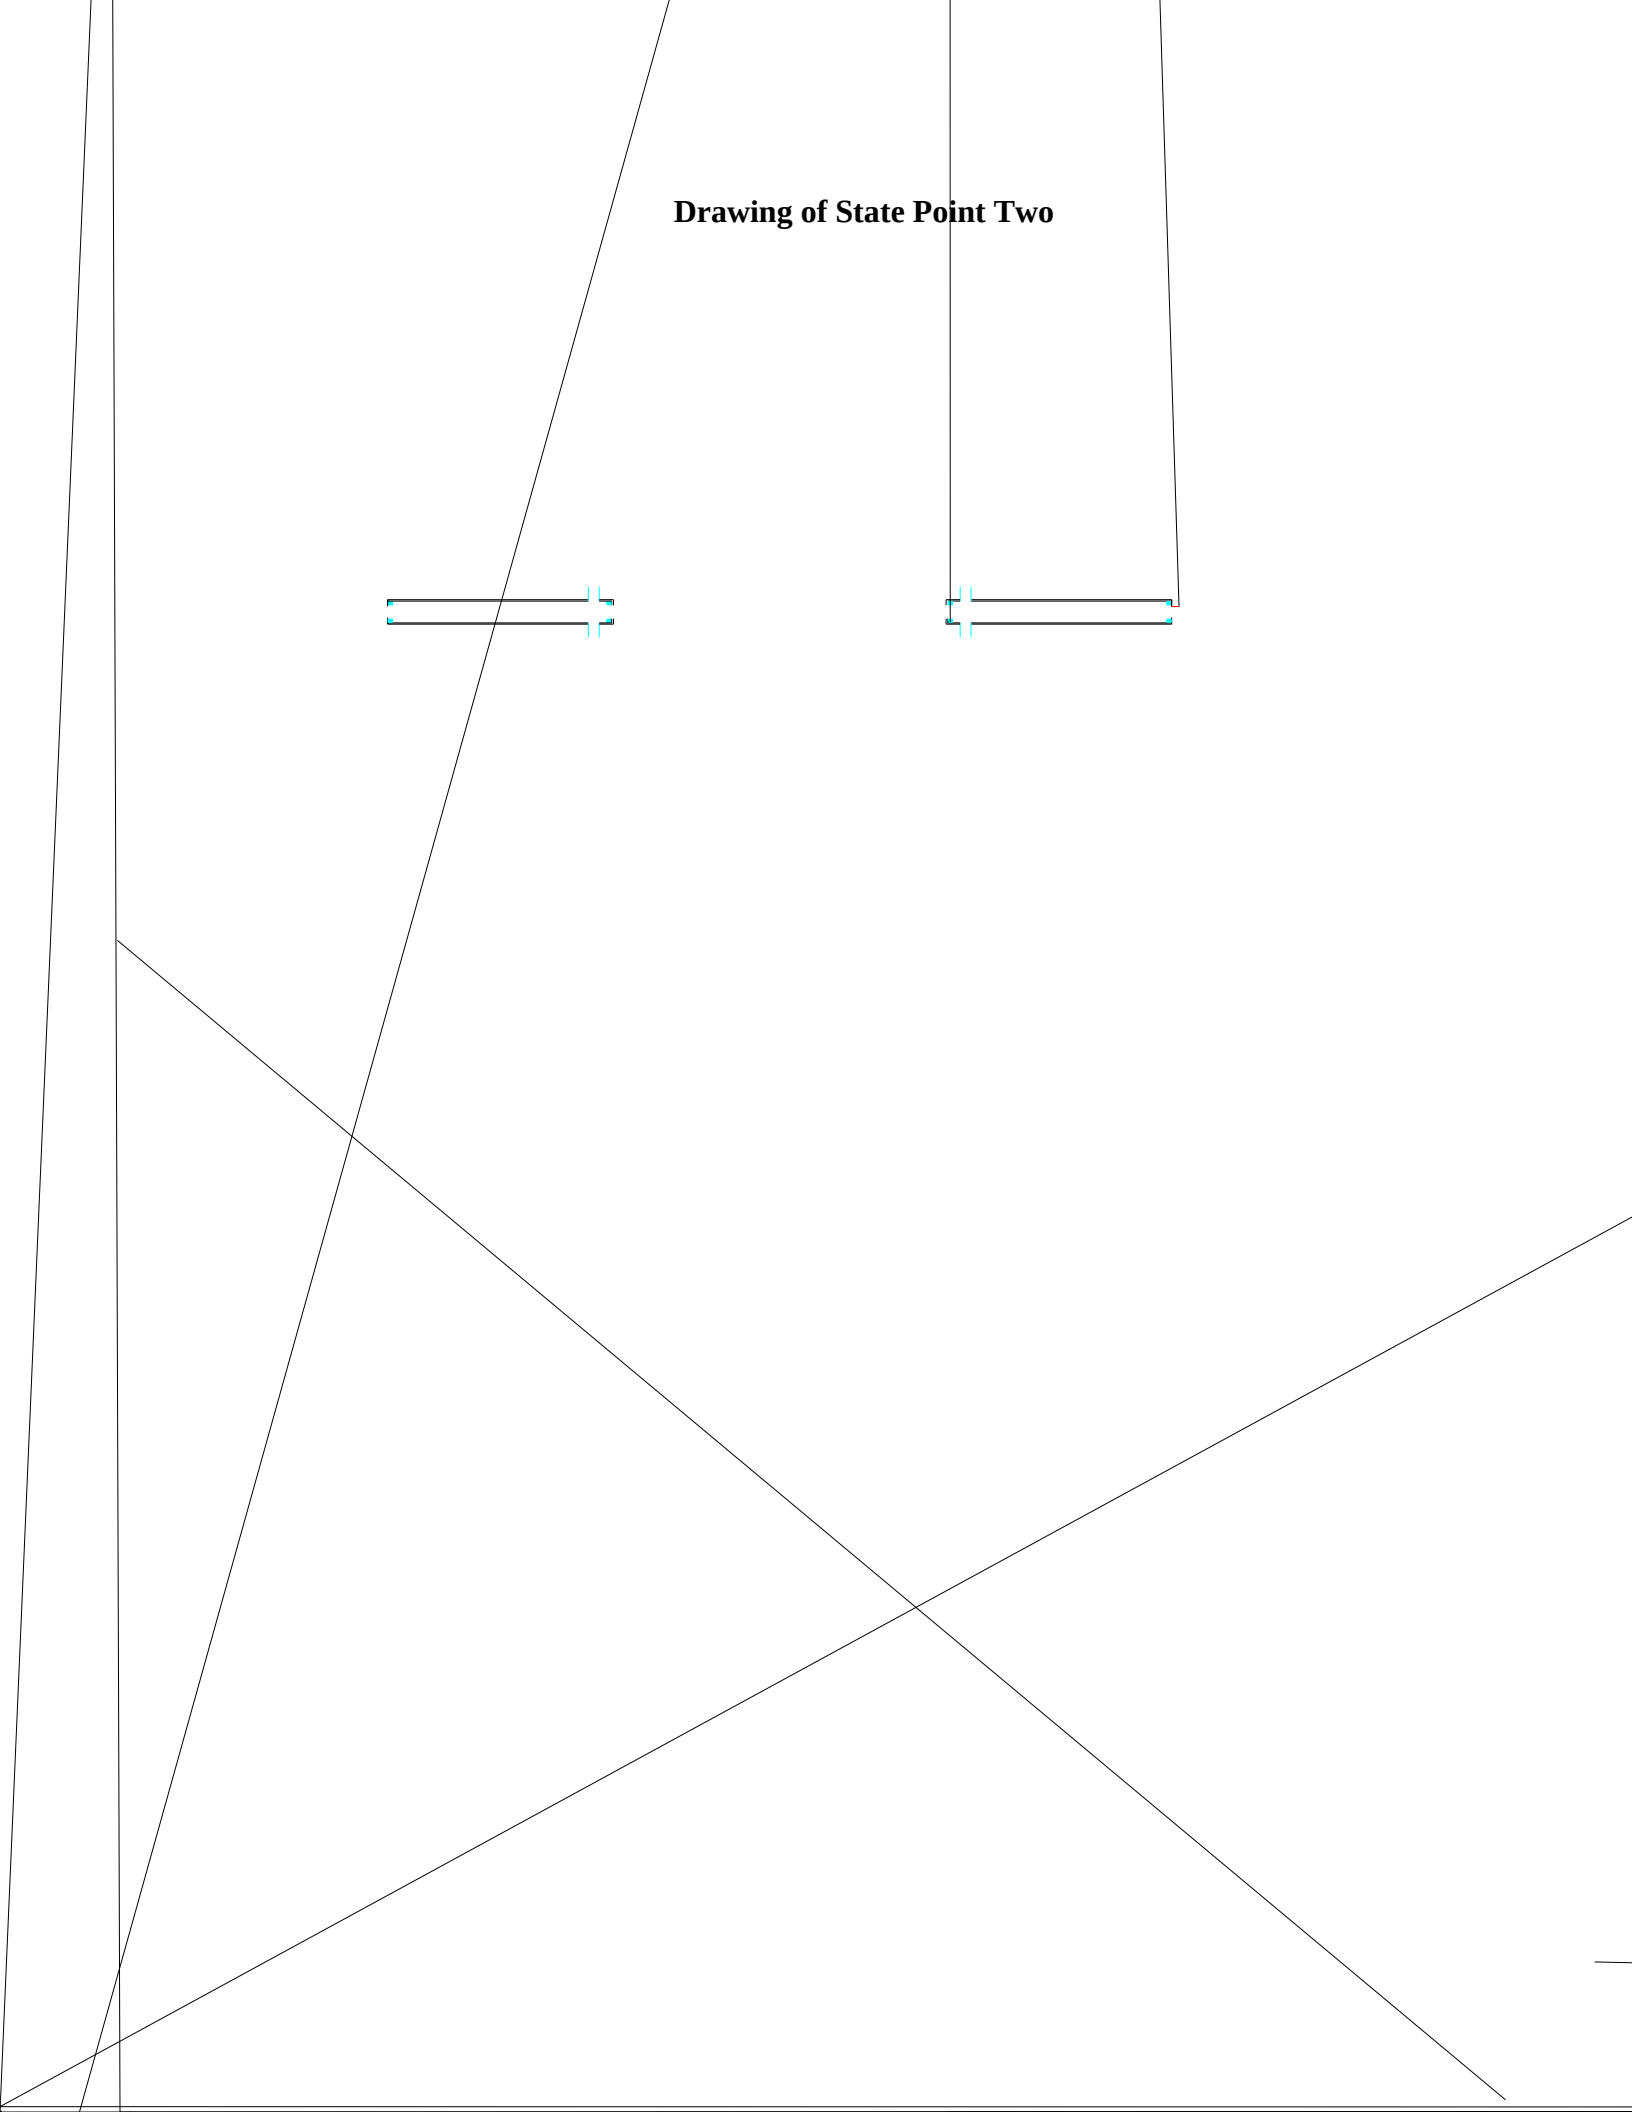

VII. Linear Power, Ltd. Te

Development of a mature gas and oil well power generation program will act to insure investors in drilling programs that they can get a payback over time from the heat energy of the earth even if they are not successful in striking petroleum reserves – there in essence will be no more dry holes. Every well drilled will be able to generate a revenue stream.

ROBERT D. HUNT

producing power from the stored solar thermal energy within the world's oceans -- principally for island nations.

Mr. Hunt is the author of a number of published technical papers; and, he has made numerous conference presentations in the fields of Aquaculture, Aviation, and in Geothermal Power Generation.

News articles have been published regarding Mr. Hunt's inventions in almost every country in the world – most notably the GravityPlane that was recently featured in two of Japan's largest magazines during the same month. Mr. Hunt is a member of the American Institute of Aeronautics and Astronautics (AIAA), a member of the National Business Aviation Association, a member of the National Hydrogen Association, and he served as the first Chairman for the State of Mississippi for the Gulf of Mexico Program as an advisor to the EPA. Mr. Hunt received his degrees from

Prof. Efstathios E. (Stathis) Michaelides

A graduate of Oxford (B.A. Engineering Science and Economics, 1977) and Brown Universities (M.S. Engineering Science, 1979, Ph. D. Engineering Science, 1980), Professor Stathis Michaelides is currently the Leo S.We