


t } CE % μ • Z CE] • Ÿ
 } CE % μ • Z CE] • Ÿ r l b i d y ó ô ô í í

Z š š CE v • (CE u } o] • • š o] • Z - () CE % B μ š Z Ÿ CE u } q • () • š u • X K (Á Z] Z š Z Z š AE Z v P
 • Ÿ } v • Z Á Á CE Ç - š } (CE P š o CE P CE Z Ÿ } • X d Z u } o] • μ • š } • Ÿ u š Z š AE š CE • Ÿ } v • (CE) u š Z • C • r
 š u • CE]] v h X ^ X W š v š - ô š j ô ô ô š U ô ô ô Z X & } š CE (ψ • () CE v o Ç •] • U]] š š Z } CE r š Z š š Z • }] o
 u o CE •] • š v] • u μ Z o CE P] CE š š Z CE u š Z CE] • μ] š v - o } } (% š Z Ç • š } μ • CE]] v h X ^ X W
 š v š ô U ô ô ô i U ô ô ô X } v Á CE • o Ç U š Z CE š } (v - CE] P Ç Z AE š CE Ÿ } v (CE X o B U] CE • }] Ç š Z • }] o

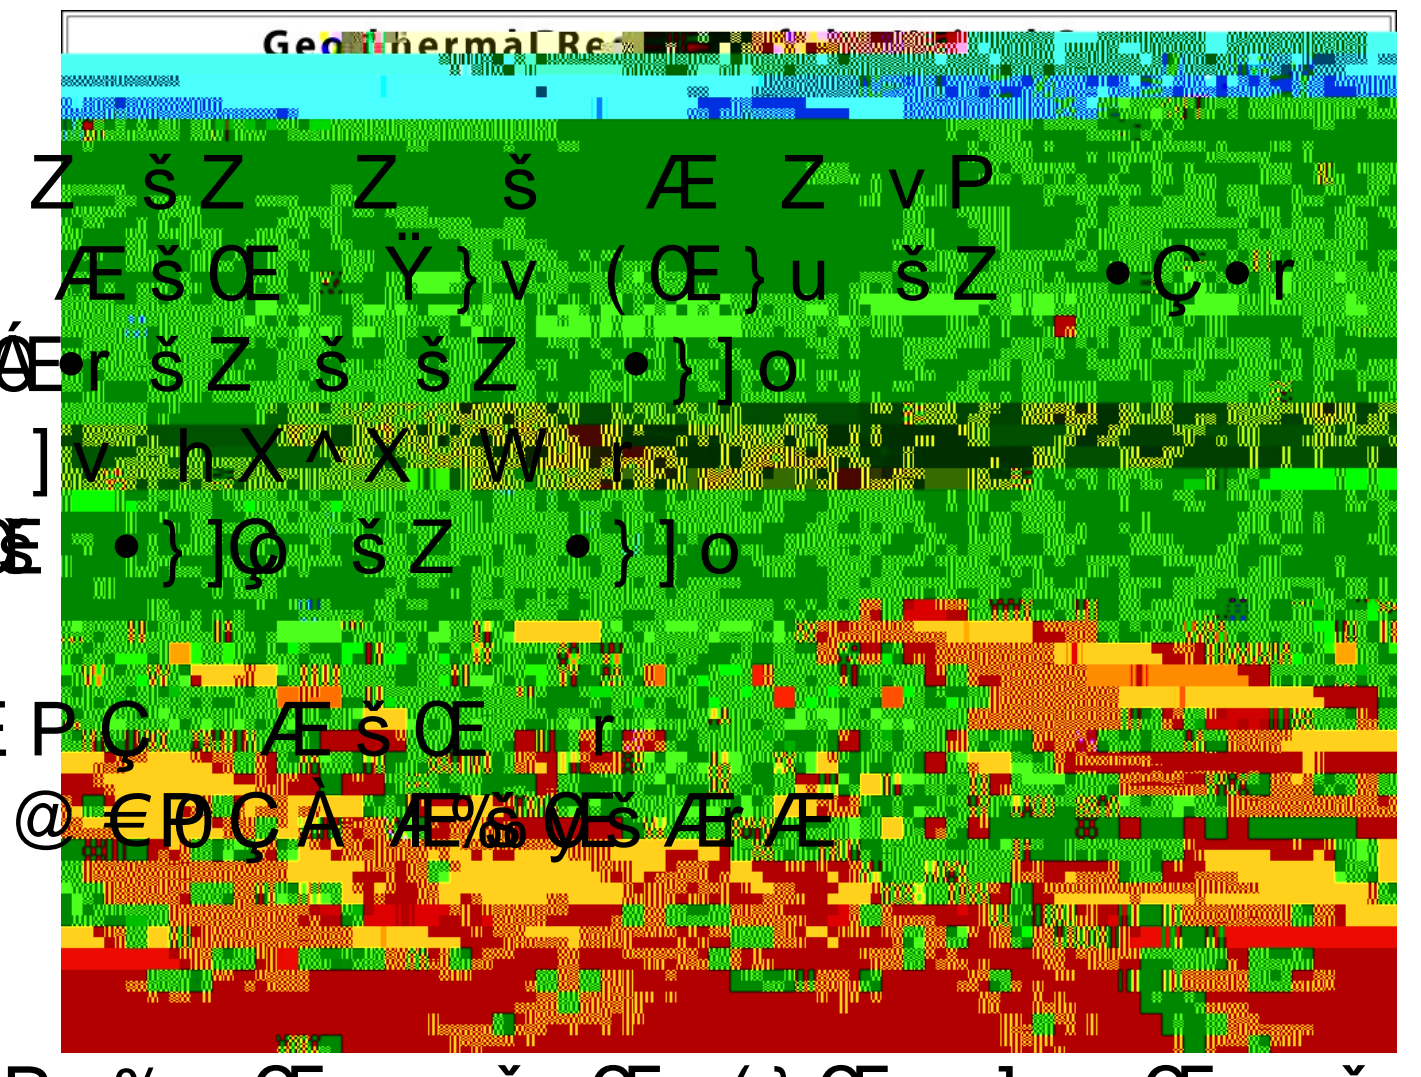

% v v Ç } (š Z v CE P Ç AE š CE]
 Ÿ } v X d Z CE • μ o š • Z } Á š Z] š (CE š % % CE š μ CE } (š Z Z š AE - B' P y • 0 @ € P C A AE š CE AE / AE

Ÿ } v X d Z u } o o • }] - Ÿ Ÿ . v • } } w p v % CE u š CE š Z š v μ • • • o] v P % CE u š CE () CE] + CE v š] r
 u š CE • } (š Z Z š AE Z v P • Ÿ } v X

Ž d Z] • Á } CE | Á • • μ % % } CE š U] v % CE š U Ç / v v CE ' } U >> X

Specific Objectives

- Develop mathematical model to estimate heat extraction from closed-loop geothermal systems that are characterized by
 - Large aspect ratios, i.e., large length/diameter ratios, presenting challenges to numerical calculation
 - Time scale of years
 - Complex physical properties

Case Study InnerGeo U.S. Patent 8,991,488 B2



Table 1. Summary of Geometric and Operating Parameters


Geometry	
Well diameter:	17 in
Injection tube:	8 in
Production (heated water) tube:	3 in
Heated tube section (horizontal):	5280
Operating condition	
Feed water:	200 F
Production water:	350 F
Flowrate:	1000 gallon/min

QuasiSteady State WaterSide Heat Transfer

- Water-side heat transfer
 - Heatload and overall heat transfer coefficient needed
 - $\dot{M} L \epsilon 3 D_b F D_b = 20.4 MW_{th}$
 - $7_a L \dot{M} (\# i 6_s \lambda) = 201.3 W/m^{\circ}C$
 - Tube heat transfer coefficient/water properties
 - $0.0 QL r \ddot{a} t u 4 A^{\#} 2 N^{\#}$
 - $7_a = 2,117 W/m^{\circ}C >> 201.3 W/m^{\circ}C$
- Water-side can deliver heat transfer needed


QuasiSteady State SoilSide Heat Transfer

- Soilside
 - Heat transfer from soil to wall
 - $\dot{M}_s L t \epsilon . G_s \epsilon_{so} F \epsilon_s ; \dot{Z} \cdot N$
 - Thermal penetration length
 - $\delta = r_p$

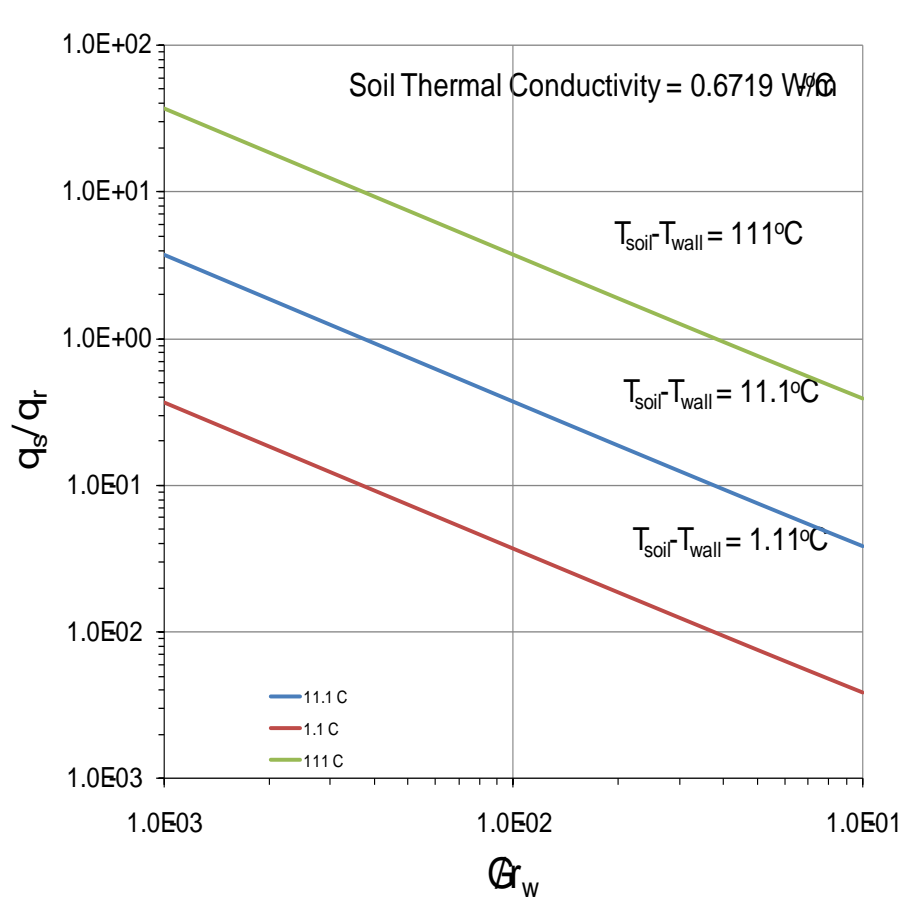

Line Source Analysis

Soil Temperature Requirements

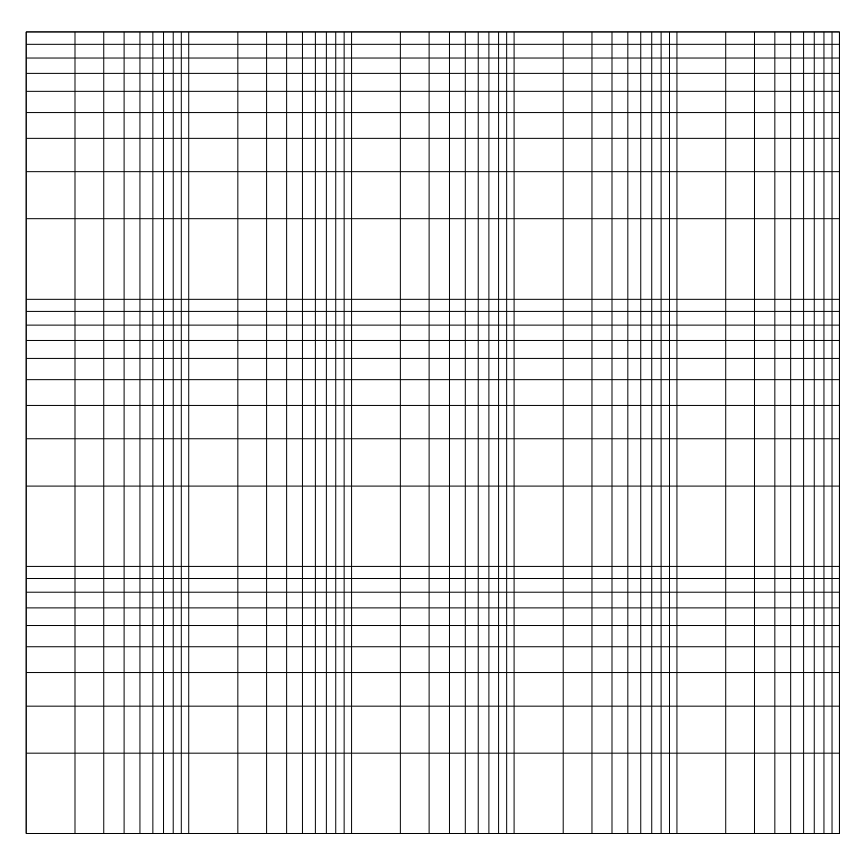

, š Z š Á • X ^ Á] o o _ W CE }

± ^ Á] o o _ % CE } μ š }
 decreases with increasing
 heat rate extraction

heat rate extraction